S2 CURRENT DESIGN V1 R2.1 — completeness pass
R2 layout locked; doors and requirement candidates visible; formal CAD HOLD

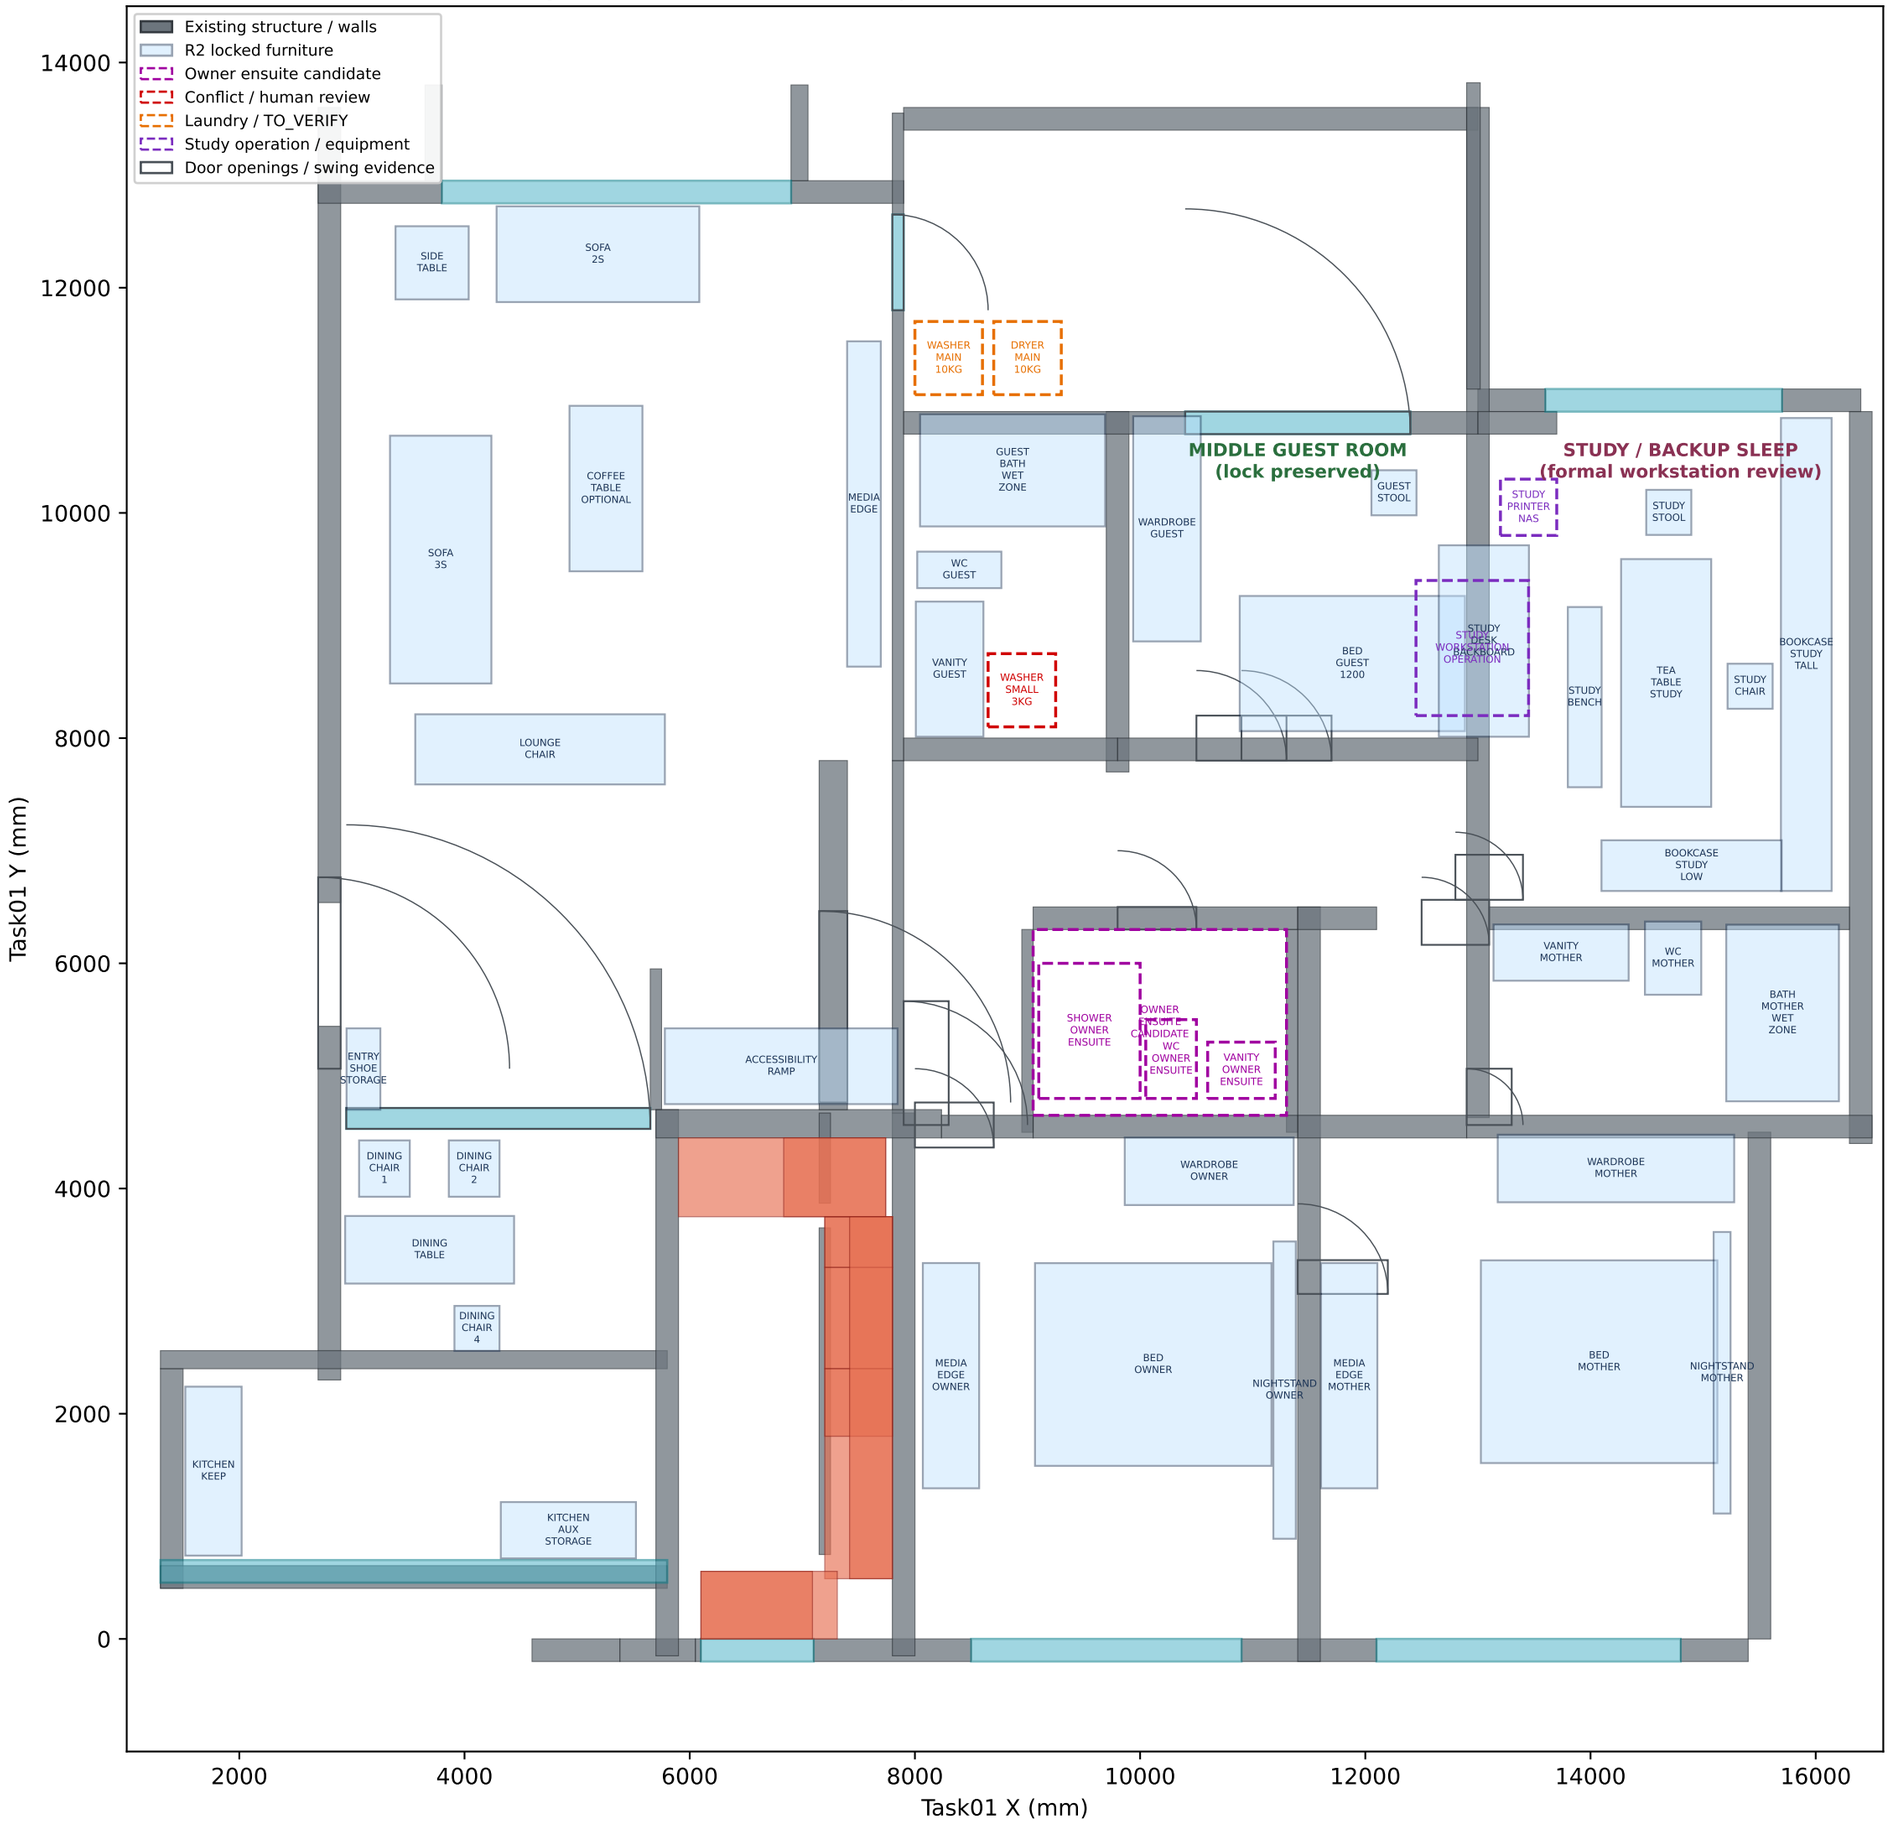

R2.1 Critical Clearance Review

Metric	Available	Target	Shortfall	Status
BED_GUEST_1200 side clearance	15	600	585	CONFLICT
BED_GUEST_1200 end clearance	1438	600	0	PASS
BED_OWNER side clearance	233	600	367	CONFLICT
BED_OWNER end clearance	1113	600	0	PASS
BED_MOTHER side clearance	174	600	426	CONFLICT
BED_MOTHER end clearance	1088	600	0	PASS
guest WC front clearance	1044	800	0	PASS
guest WC side clearance	121	600	479	CONFLICT
guest vanity operating clearance	1042	600	0	PASS
3kg washer operating clearance	—	600	—	TO_VERIFY
owner ensuite candidate area	4	5	1	CONFLICT
study chair pull-back clearance	—	900	—	TO_VERIFY
dining chair pull-back clearance	40	900	860	CONFLICT
mother bath critical operating clearance	—	900	—	TO_VERIFY
owner ensuite critical clearance	—	900	—	TO_VERIFY
living to north balcony existing door clear width	850	850	0	PASS